



Yuasa Technical Data Sheet

Yuasa YBX3056 - YBX3000 SMF Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Voltage	12V
Capacity (20-hour)	36Ah
Cold Cranking Amps (EN1)	330A

Dimensions

Length	187mm
Width	135mm
Height	227mm



Weights & Measures

Mean Weight with Acid	9.3kg
-----------------------	-------

Container Features

Case Type	JIS B19 + B1
Hold Down	B1
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca
VDA Roll Over Test	PE
Recommended Charge Rate	✓
Performance Marking	3A
	W3-C2-V2-E1


Terminal Type

T1/T3


Standard DIN Post




Remove T1 adapter for T3



Cell Assembly Layout

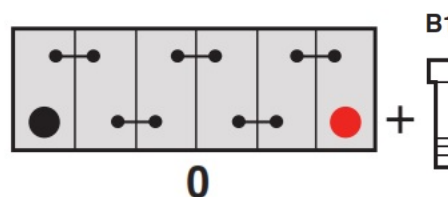

Battery Hold-down

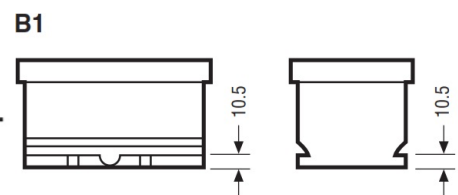

Data Sheet generated on 04/12/2021 - E&OE